




**Innovative Electronic
Marker Products**

“PIPELINEGARD™” EM-G10



Marks Buried Pipelines

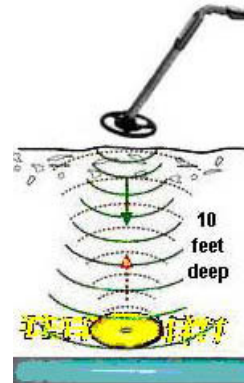

Operating Principle:

- Transmitter sends signal and listens for signal return.
- Marker receives signal and returns it to locator.
- Signal strength increases as locator gets nearer to buried marker.
- Marker range: 10 Feet

Innovative Combination Electronic Marker and Digging Shield Helps Prevent Digger Hits

Now you can locate buried pipelines without wasting time or risking damage.
“The Best Way to Mark, Find, and Protect Pipelines”

This innovative combination consists of three basic elements:

- Durable yellow plastic shield helps protect pipelines from shovels and back hoes.
- Electronic Marker attached to PipelineGard easily and quickly locates target points.
- Works with any marker locator made by Rycom™, 3M™, Metrotech™, Tempo™, Dynatel™ and EMSII.
(Operates on standard designated 83.0 kHz gas frequency)

GPS + GIS

Provides up-to-date facilities asset management when used in conjunction with hand held GPS and GIS mapping database.

X,Y,Z PinPoint Field Locating 2” accuracy is easily achieved with low cost GPS and electronic marker locators.

“PIPELINEGARD™” EM-G10
HELPS PROTECT PIPELINES FROM DAMAGING DIG-INS

The pipeline industry continues to evolve at an ever increasing rate. This growth and development places new demands on construction and maintenance to design and install reliable systems featuring damage prevention products.

EASY TO USE

- Place:** Place PipelineGard one foot above pipe (cable tie optional). Back fill to grade.
- Locate:** Identify PipelineGard location with marker locator. Record GPS way point coordinates.
- Excavate:** Excavate to PipelineGard and remove.
- Reentry:** Hand dig to pipe.
- Backfill:** Replace PipelineGard.

PRODUCT SPECIFICATIONS - ORDERING INFORMATION

Product Name	Telemark PipelineGard	Depth Range	10 feet
Model Number	EM-G10	Frequency	83.0 kHz
Size	48” x 12” x 1”	Operating Temp	-30° to 160° F
Weight	1.0 lb.	Storage Temp	-40° to 167° F
Packaging:	10 units / case	Color Code	Gas Yellow

Important notice to purchasers: All statements, technical information and recommendations contained herein are based on information we believe to be reliable, but the accuracy and completeness thereof is not guaranteed. The following is made in lieu of all warranties, expressed or implied: Telemark Solutions™ Inc.'s obligation shall be to repair or replace any Telemark product proven to be defective within one year after shipment. Neither seller nor manufacturer shall be liable for injury, loss or damage, direct or consequential, arising out of the use of this product. User shall determine suitability of product for his intended use. User assumes all risk and liability in the use of the product. No statement or recommendation contained herein shall have any force or effect unless in an agreement signed by officers of Telemark Solutions™. Telemark and PipelineGard are trademarks of Telemark Solutions™ Inc. Patented and other patents pending.

Telemark Solutions™
302 Wright Drive
Georgetown, Texas 78628
Ph / Fax: 512-869-8855
Email: Telemark@texas.net
www.telemarksolutions.com