




**Telemark™**  
**Solutions**

**THE BEST WAY TO FIND BOXES**

## TELEMARK™

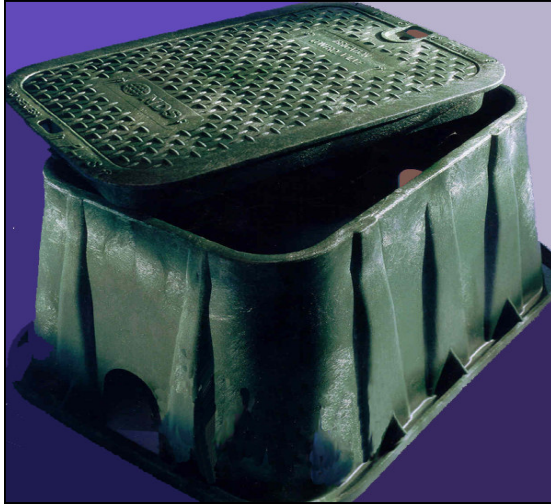

Pinpoint Buried Hand Holes

**THE TELEMARK ELECTRONIC MARKER**  
**A Unique Product for Quick and Accurate Locating of Hand Holes, Vaults and Boxes.**

### IMPORTANT BENEFITS

- Combination Lid and Electronic Marker
- Eliminates Guesswork
- Works with any Electronic Marker Locator made by 3M™, Metrotech™, Tempo™, Dynatel™, EMSII and Rycom™
- Fastest Way to Locate

### GPS + GIS

Provides up-to-date facilities asset management when used in conjunction with hand held GPS and GIS mapping database.

X,Y,Z PinPoint Field Locating 2" accuracy is easily achieved with low cost GPS and electronic marker locators.

### LOW PROFILE DESIGN


Specifically designed to be attached to the lid. The Telemark has less than a 1/2" lateral surface area which results in a minimal effect on the strength of the lid. Pre-installing electronic markers ensures accurate locatability every time

### APPLICATIONS

- Hand Holes
- Vaults & Boxes
- Any Polymer Concrete or Concrete Lid

# TELEMARK™

**THE BEST WAY TO MARK AND LOCATE BOXES.**

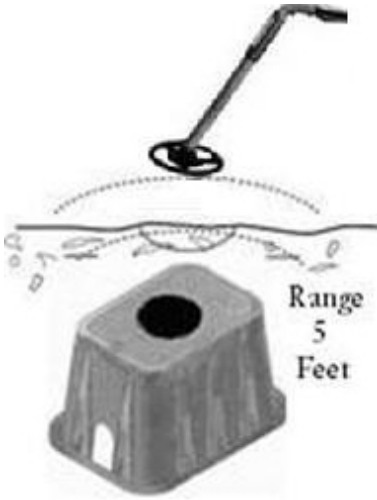

**Operating Principle:**

- Marker locator\* sends signal and listens for signal return
- Marker receives signal and returns it to locator
- Signal strength increases as locator gets nearer to buried marker
- Marker Range: 5 Feet

\*Works with any Electronic Marker Locator made by 3M™, Metrotech™, Tempo™, Dynatel™, EMSII and Rycom™

## EASY TO USE

- Place:** Attach Telemark to underside of Lid  
**Locate:** Identify Telemark Location with any Marker Locator

## PRODUCT SELECTOR

Utility	Color	Frequency	Part # OEM Coil	Part # Lid Molded Case
Water	Blue	145.7 kHz	VM-500	6760
Telcom	Orange	101.4 kHz	VM-200	6560
Power	Red	169.8 kHz	VM-300	6460
Waste Water	Green	121.6 kHz		6860
Gas	Yellow	83.0 kHz		6660

## PRODUCT SPECIFICATIONS

Product Name	Telemark	Depth Range	5 feet
Size	4½" x 1½"	Operating Temp	-30° to 167° F
Weight	.20 lbs.	Storage Temp	-40° to 167° F
Packaging:	100 units / case		

Important notice to purchasers: All statements, technical information and recommendations contained herein are based on information we believe to be reliable, but the accuracy and completeness thereof is not guaranteed. The following is made in lieu of all warranties, expressed or implied: Telemark Solutions™ Inc.'s obligation shall be to repair or replace any Telemark product proven to be defective within one year after shipment. Neither seller nor manufacturer shall be liable for injury, loss or damage, direct or consequential, arising out of the use of this product. User shall determine suitability of product for his intended use. User assumes all risk and liability in the use of the product. No statement or recommendation contained herein shall have any force or effect unless in an agreement signed by officers of Telemark Solutions™ Inc. Telemark is a trademark of Telemark Solutions™ Inc. Patents pending.

**Telemark Solutions™**  
**302 Wright Drive**  
**Georgetown, Texas 78628**  
**Ph / Fax: 512-869-8855**  
**Email: Telemark@texas.net**  
**www.telemarksolutions.com**